


## Excavation Details

Suggested layout


If Installing into Loosefill (sand or bark) please note uprights will be 300mm longer than specified

**FFH: 433mm**

No safety surface required as critical fall height is less than 600mm. However we suggest allowing an appropriate free space around the item in compliance with BS EN1176.

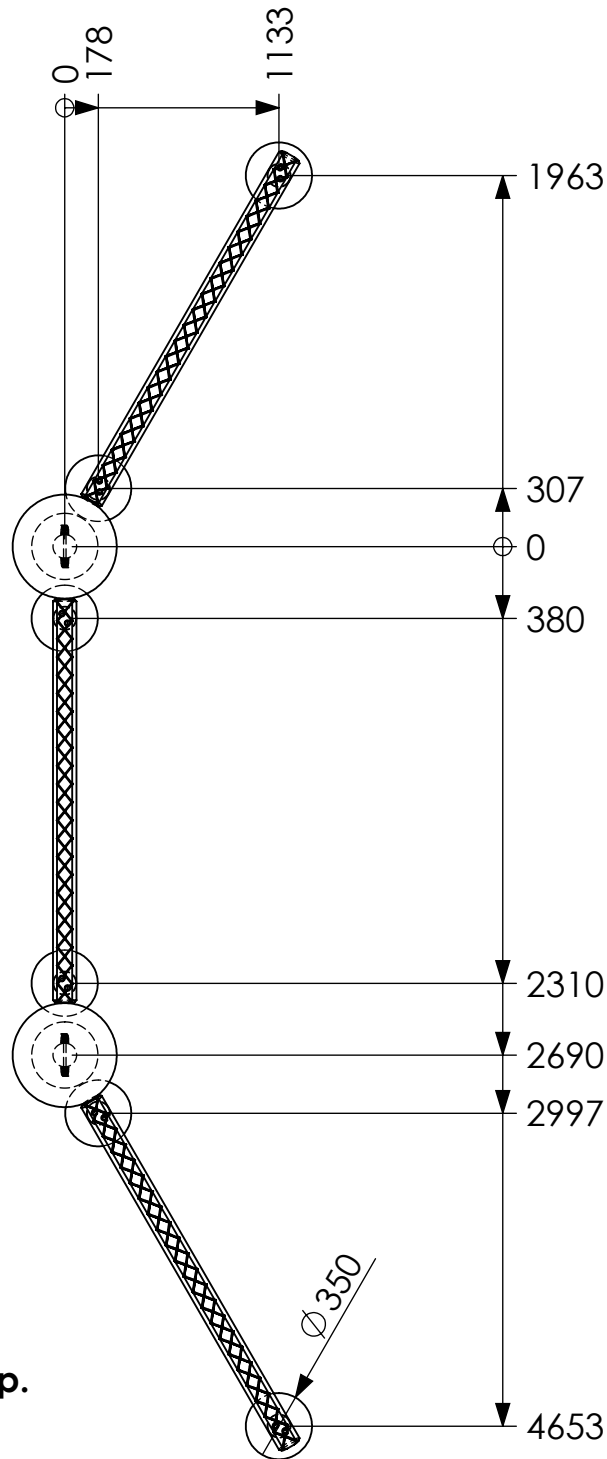

**Dig all groundworks 600mm deep.**

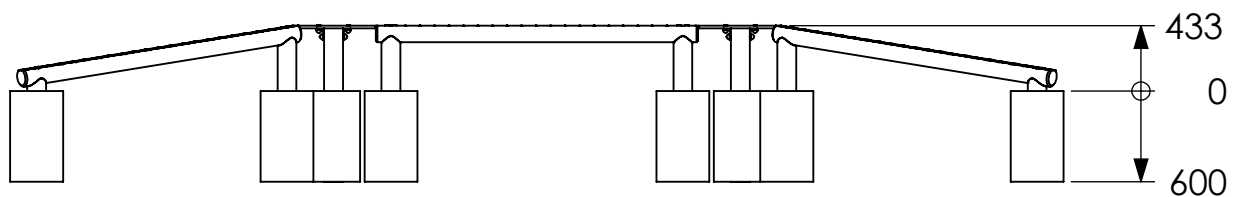

This equipment for play areas is manufactured following the codes & practice outlined in the British and European standards and in so doing meets the requirements of BSEN 1176 (general safety and test methods).