


Cross Rope

Excavation Detail

Once the rope has been fixed to the uprights the plastic egg connector can be fitted. Select the centre point where the two ropes pass and fix the egg in place by screwing the two halves together.

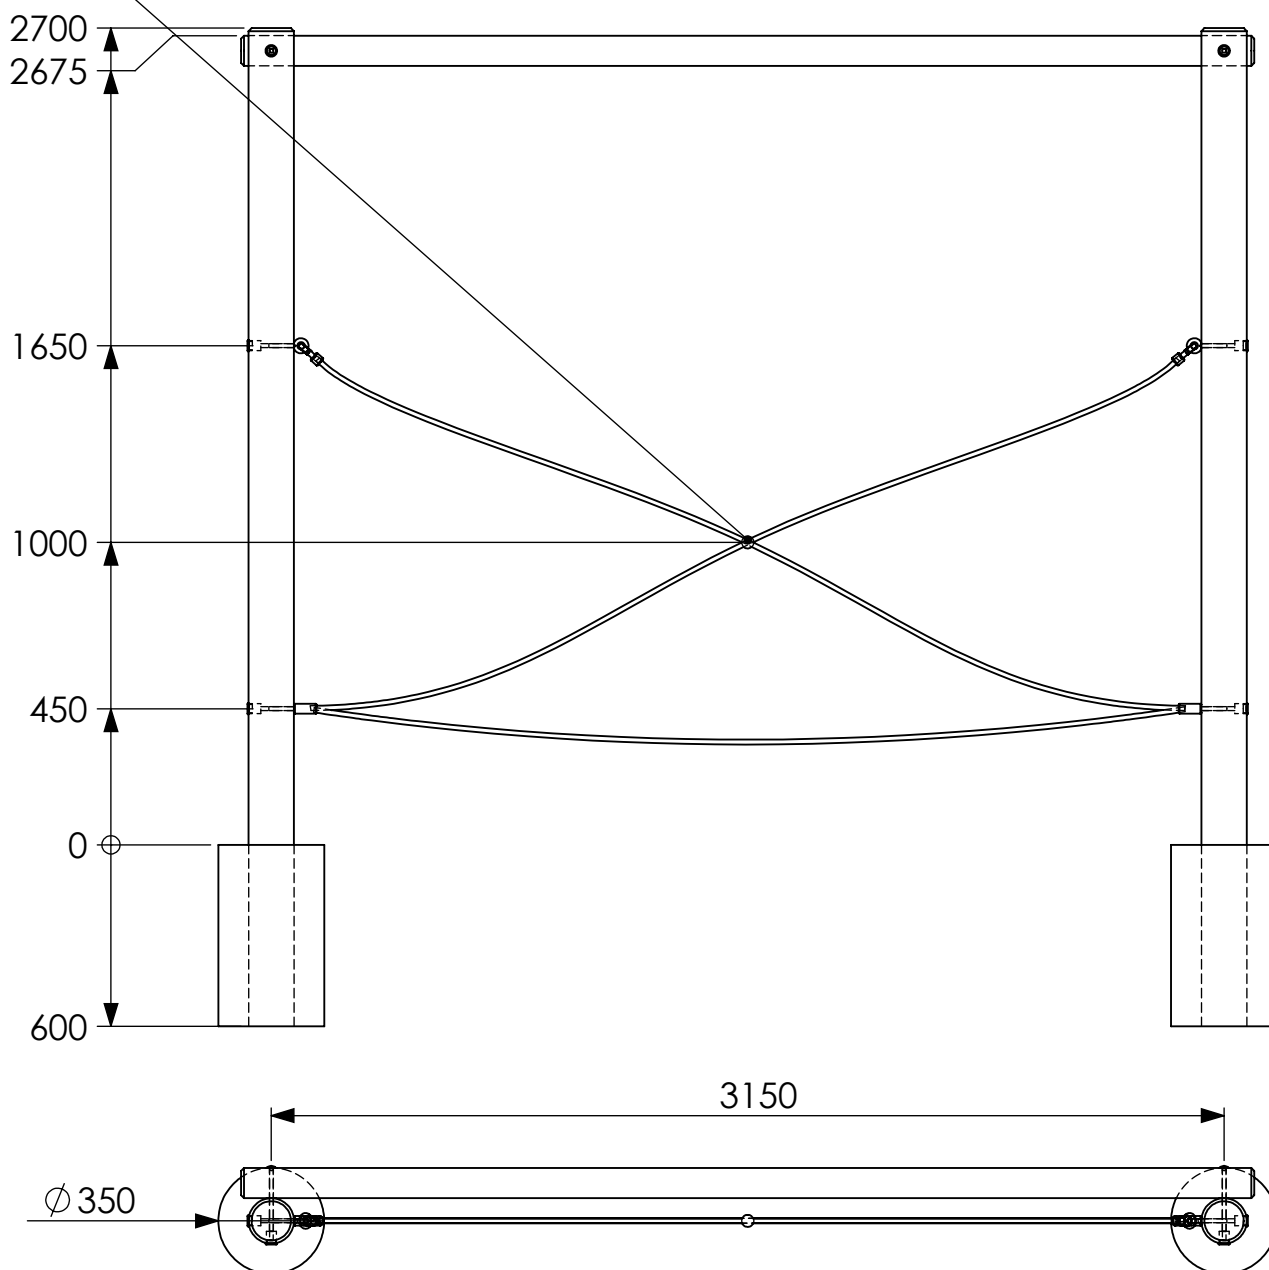

Dig groundworks 600mm deep

FFH: 473mm

No safety surface required as critical fall height is less than 600mm. However we suggest allowing an appropriate free space around the item in compliance with BS EN1176.

This equipment for play areas is manufactured following the codes & practice outlined in the British and European standards and in so doing meets the requirements of BSEN 1176 (general safety and test methods).